

318-000001





Assembling instruction

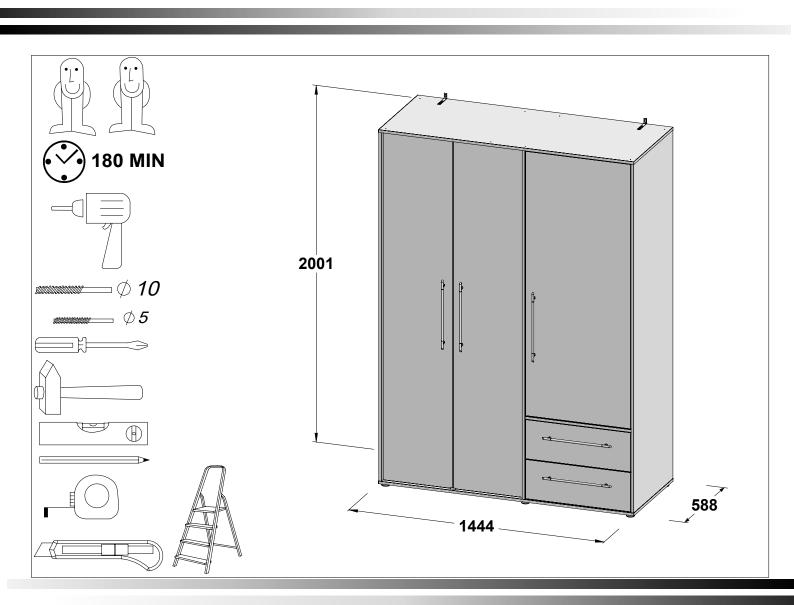



 $\textbf{EN}. \\ \textbf{Follow the manufacturer's assembly instructions, otherwise danger may occur.}$

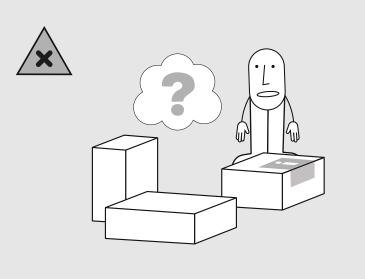


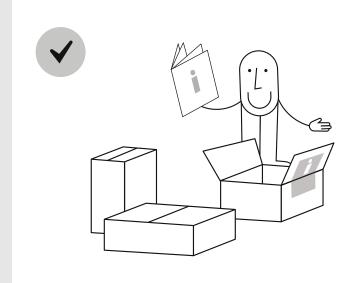


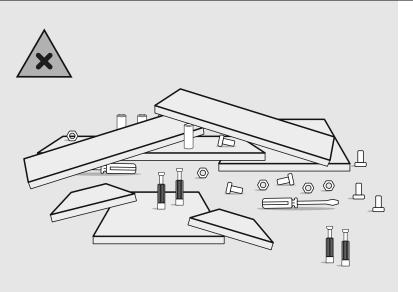


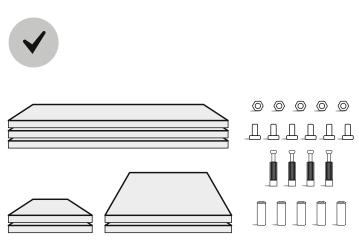

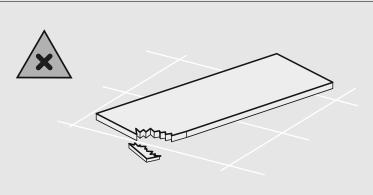


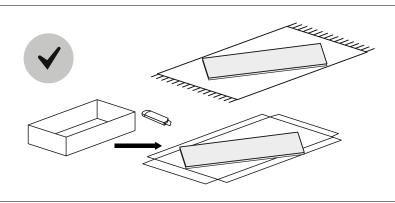


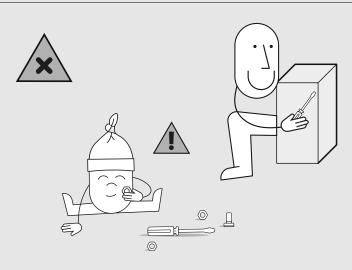


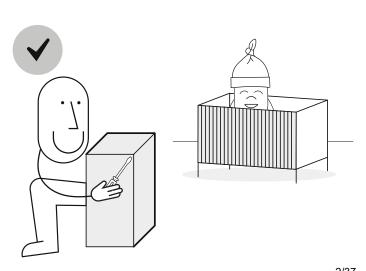










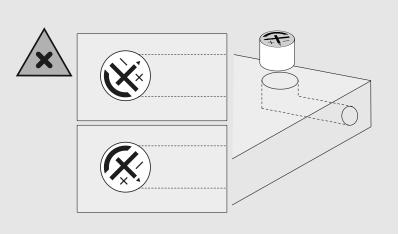

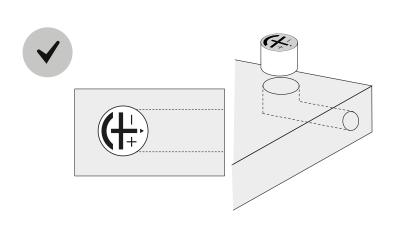








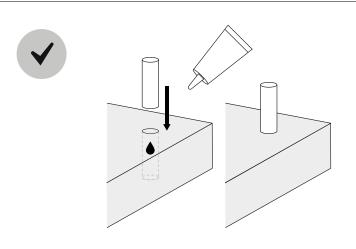










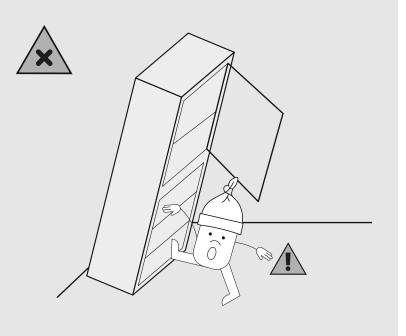


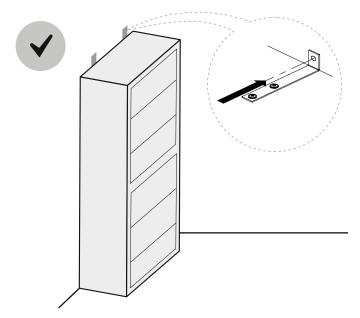















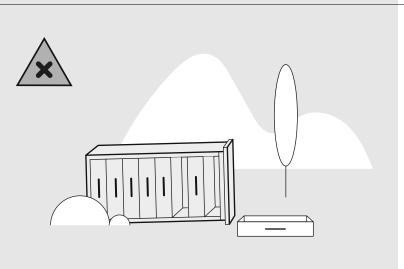


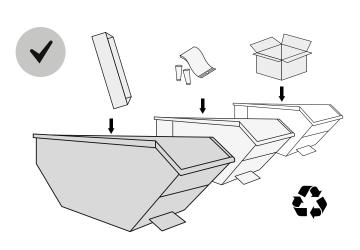

- EN -


Furniture containing wood-based panels (particle board, fibreboard, plywood etc.) may emit into indoor air inconsiderable amounts of substances used in the production processes. The level of this emission is examined and it meets the applicable standards. After assembling the furniture, it is advised to regularly ventilate the room where the furniture stands, which should last about four weeks or until the smell is eliminated.

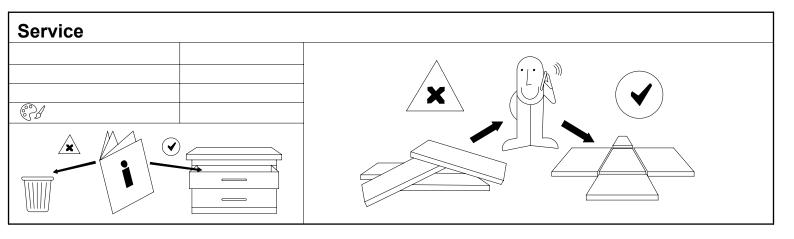


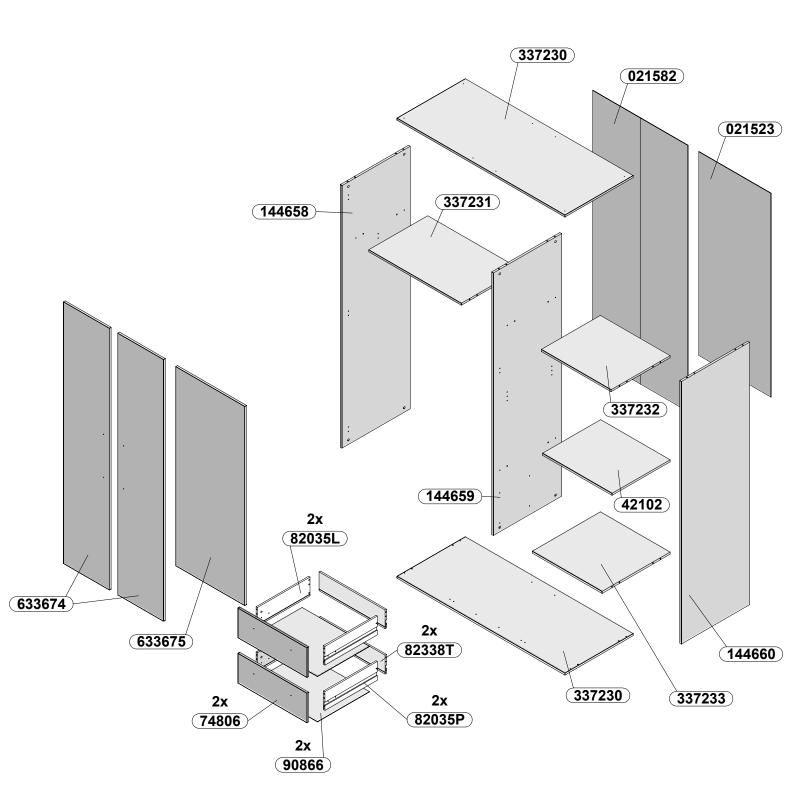



CODE	DIMENSIONS		Colli -0002	
021523	1518x620x2	1		
021582	1982x818x2			1
144658	1956x587x15		1	
144659	1956x587x15		1	
144660	1956x587x15		1	
337230	1444x588x15	2		
337231	797x508x15	1		
337232	600x508x15	1		
337233	600x586x15	1		
42102	598x500x15	1		
633674	1950x394x15			2
633675	1484x594x15	1		
74806	594x221x15			2
82035L	452x140x12			2
82035P	452x140x12			2
82338T	568x140x12			2
90866	579x448x2		2	


36x \$70969 Ø8x28		4x S39450	Hilling	28x S30211		4x S39449 Ø12x10	X
24x \$30212 Ø15x12		5x S30106 Ø3.5x15	9	10x S30157 Ø4x30		4x S30158 Ø3x12	Same.
6x S34654 Ø4x24		4x S31298-14 Ø4x14	â	8x S30102 Ø6,3x13	A	4x S30142 <i>M4x</i> 9	
60x S31299 Ø1,6x30		2x S33396		12x S30312		6x S30544	
4x \$30337-23		3x S36106		1x S30577		1x S20553N	
2x S34676-15 L=450				2x S36628 Ø10x50, Ø5x60	8		
2x S32892-N				5x S33652 L - 370/(320)			
1x S36124 L=791				4x \$36067 310x27mm	<u> </u>	April	
9x S3-S34611	4		- The second of				

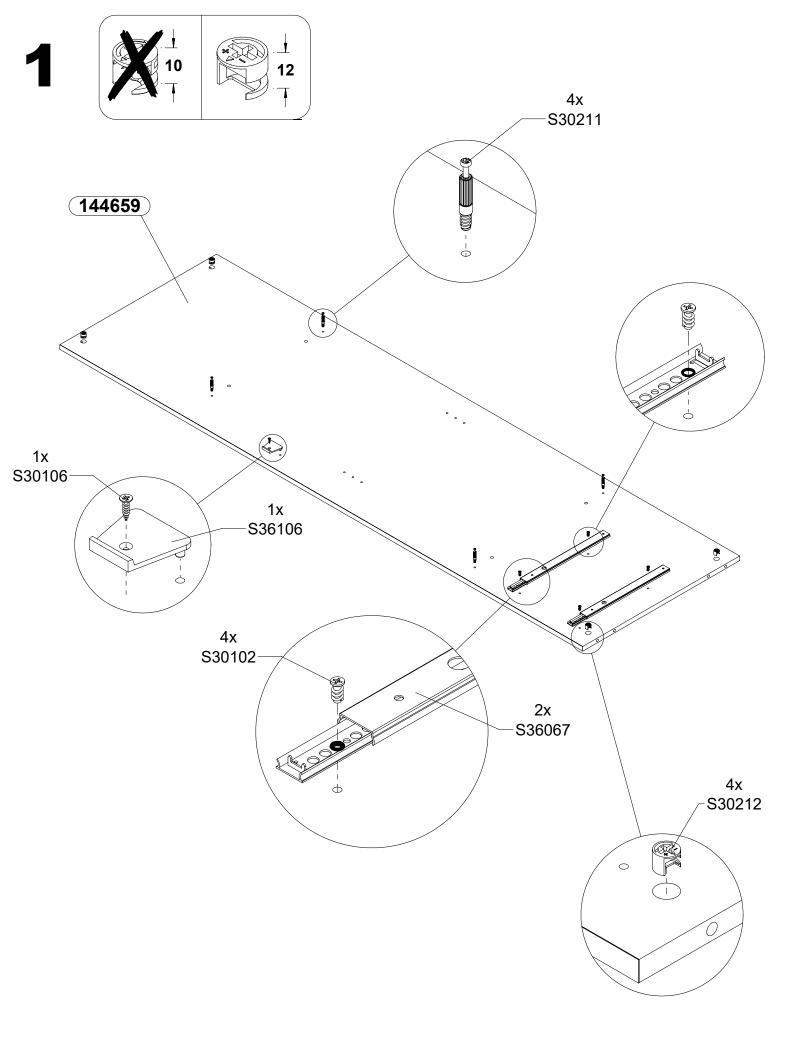








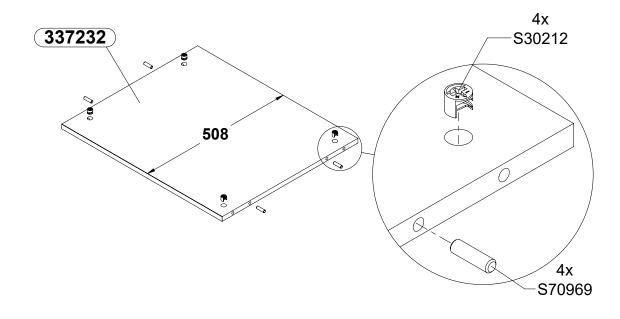


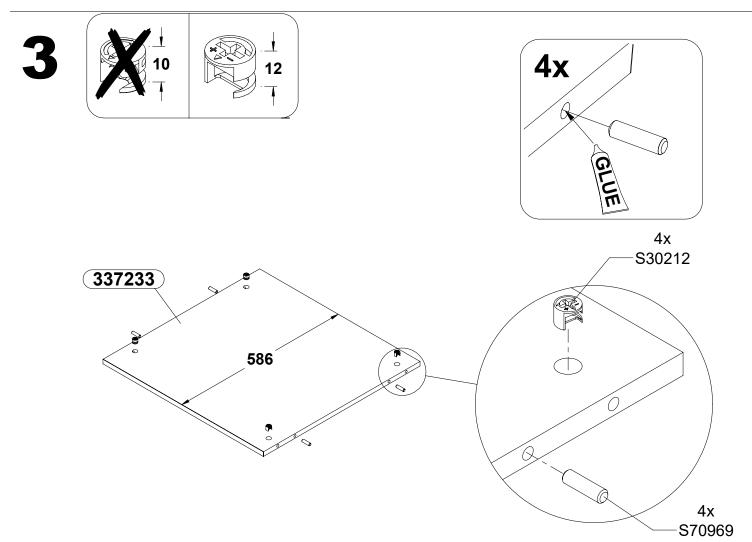


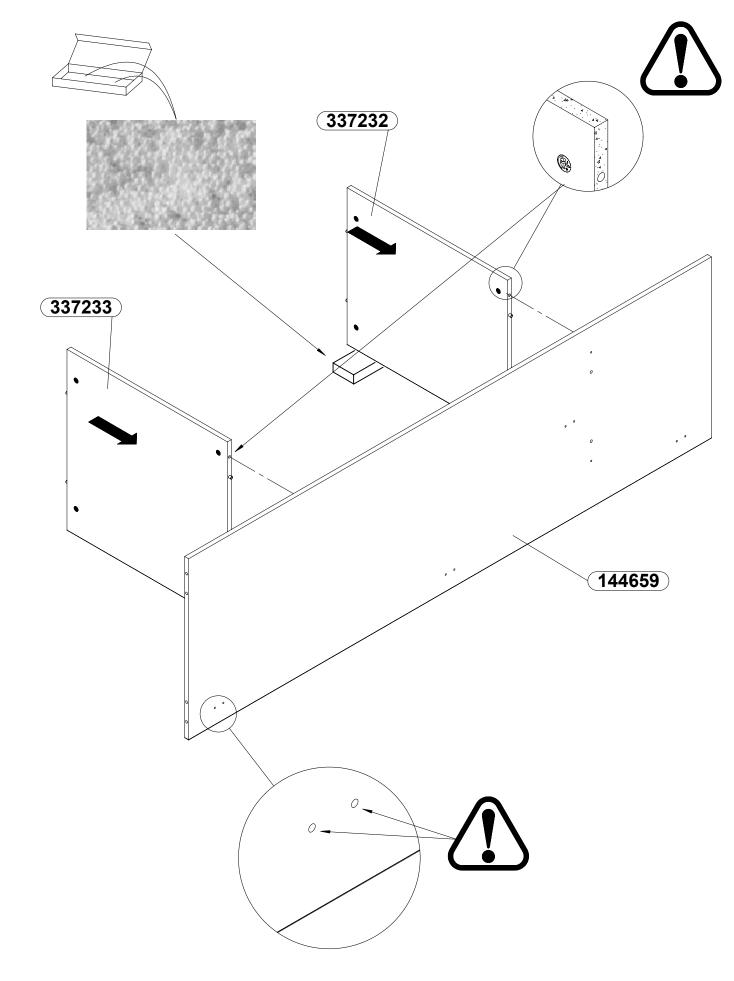





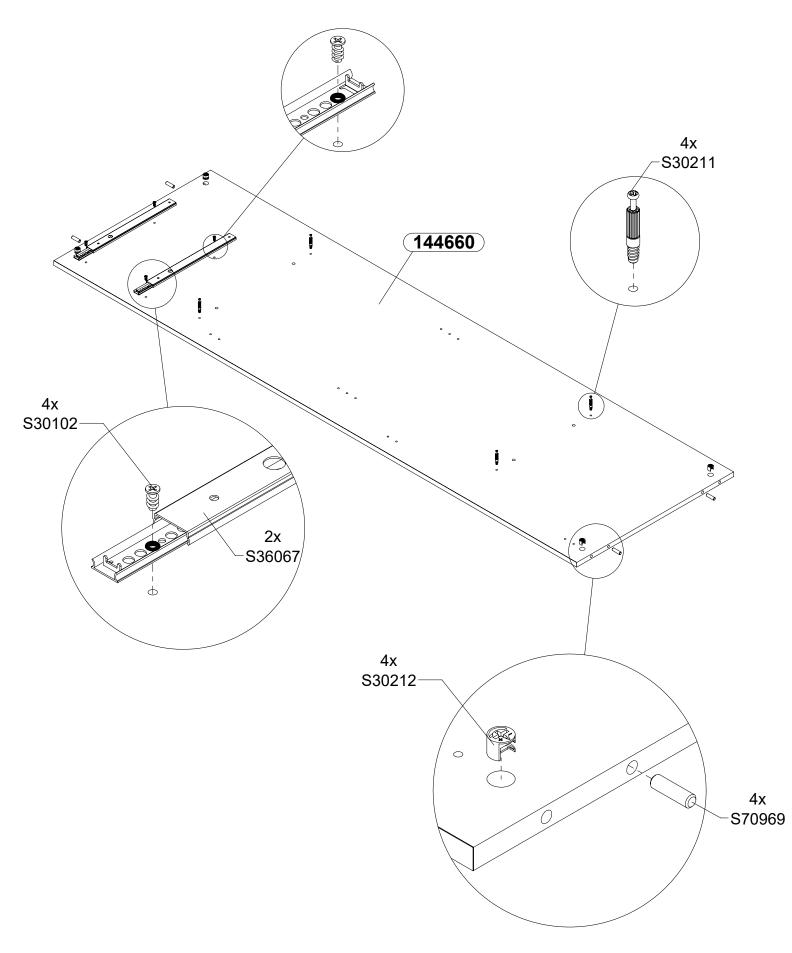


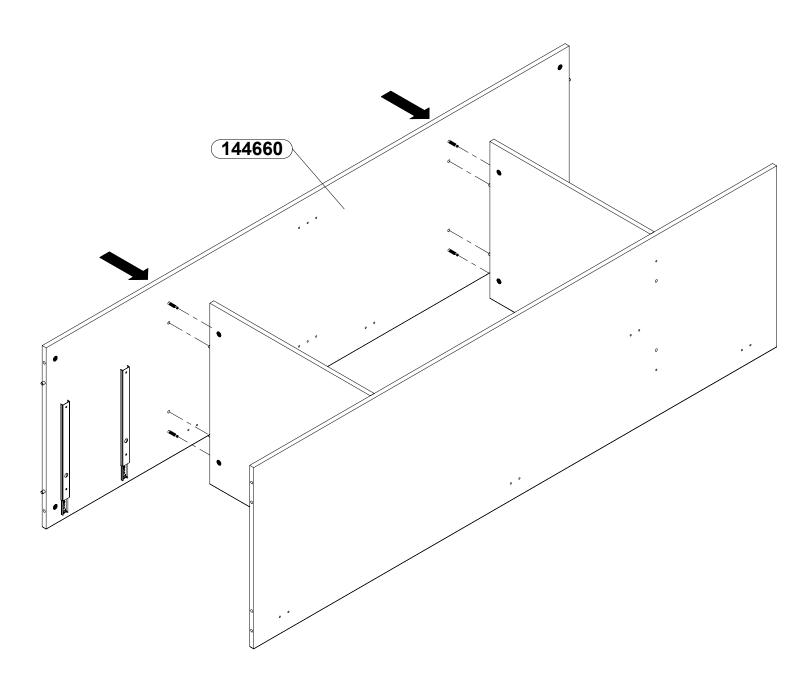





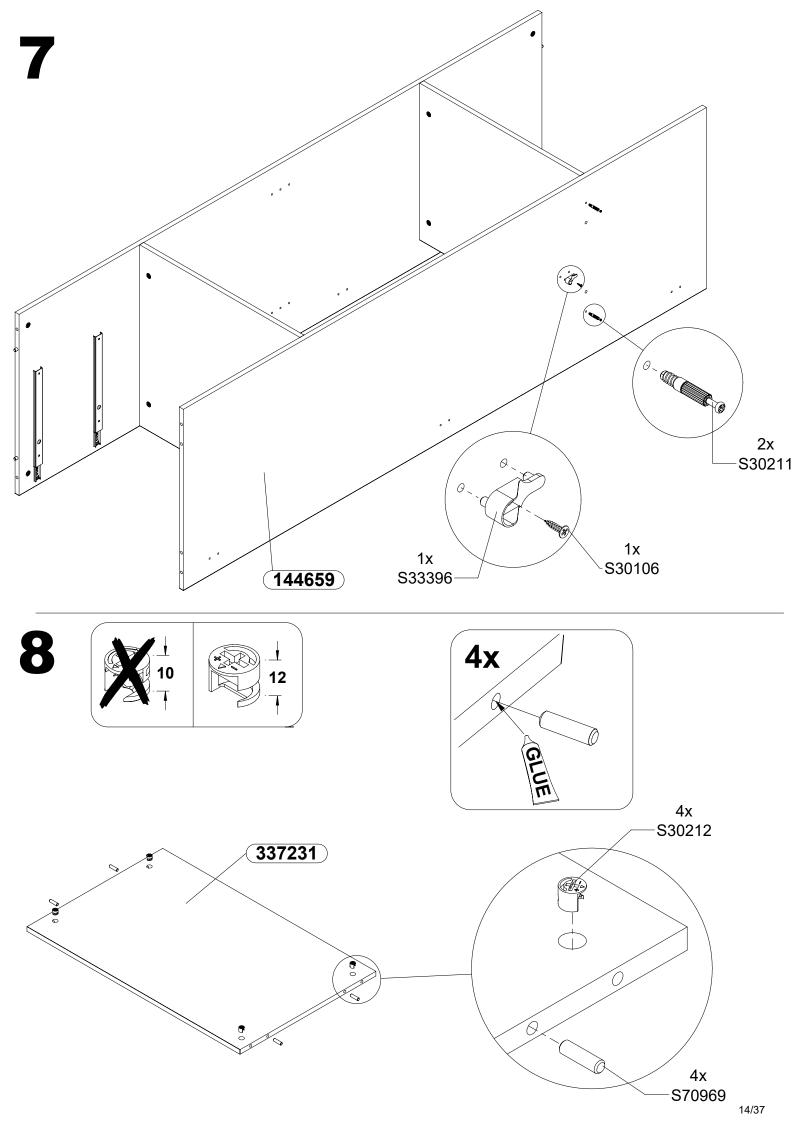


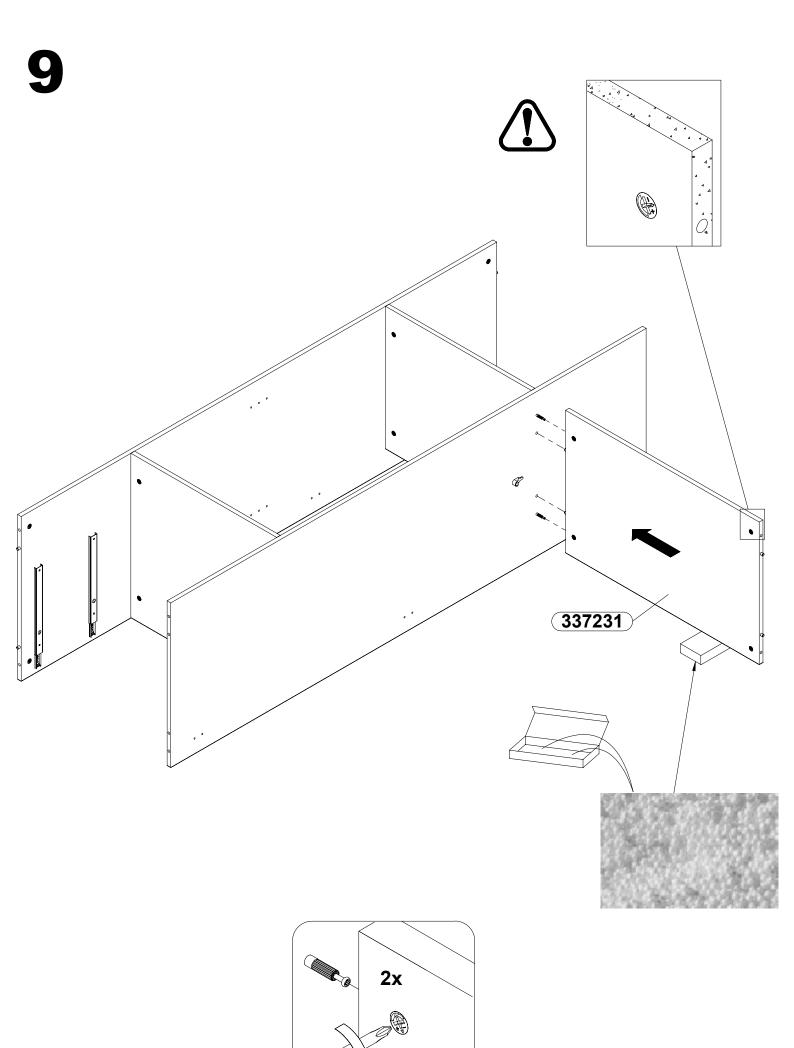





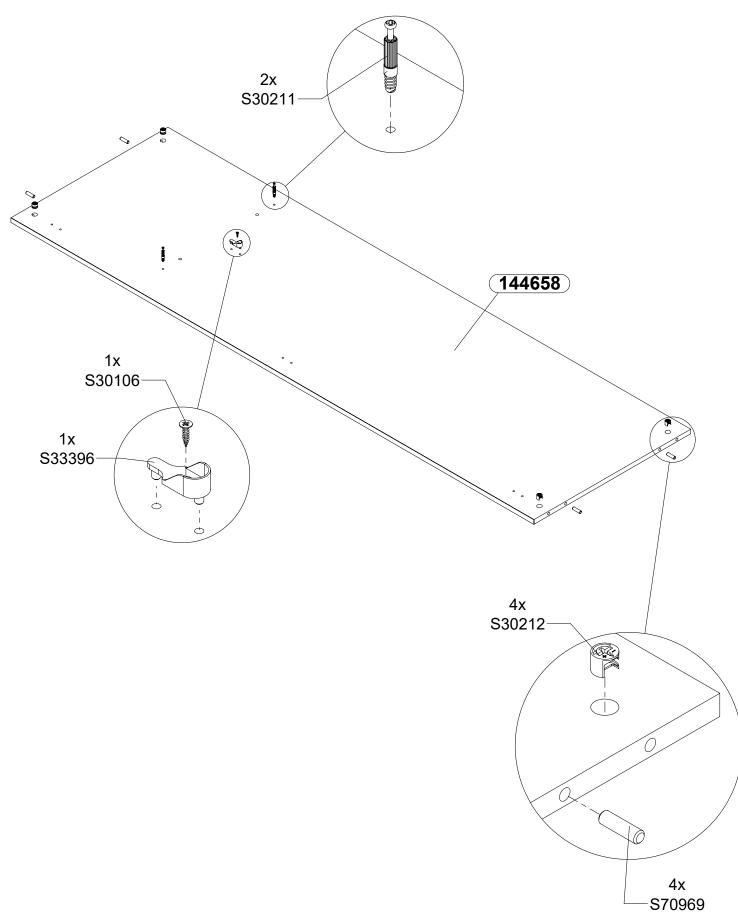


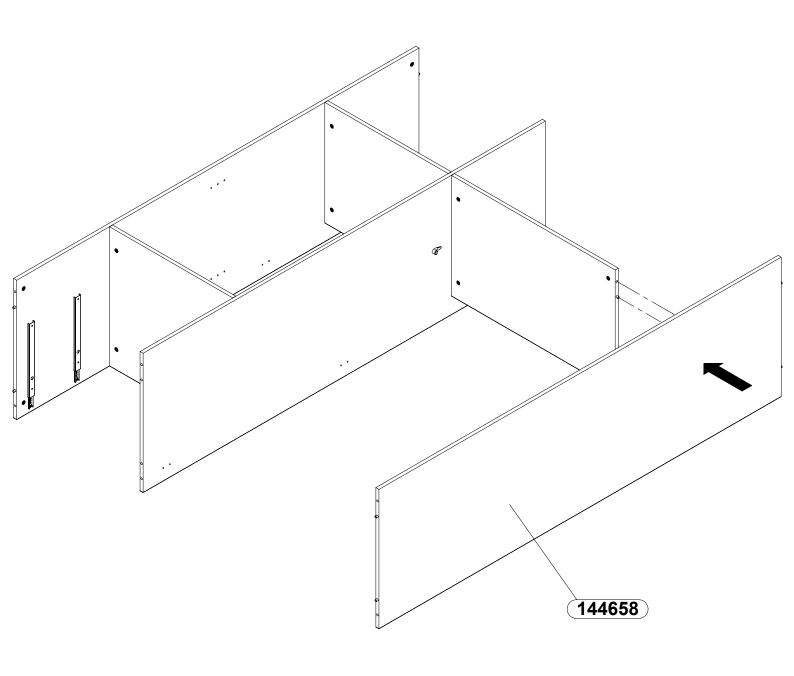




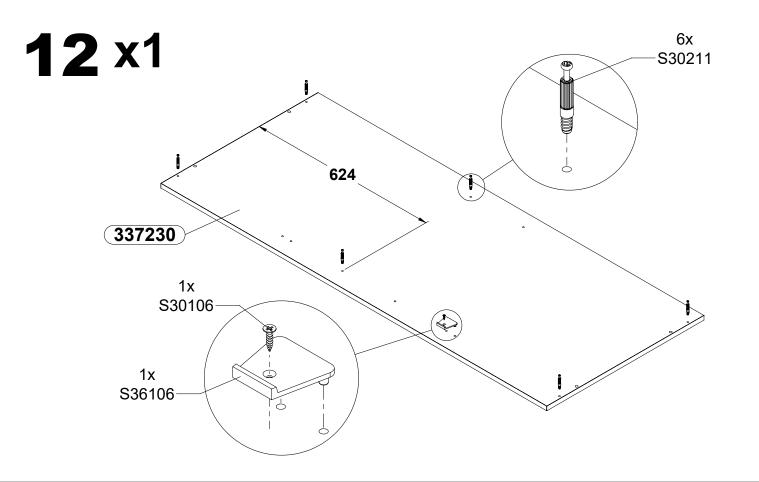


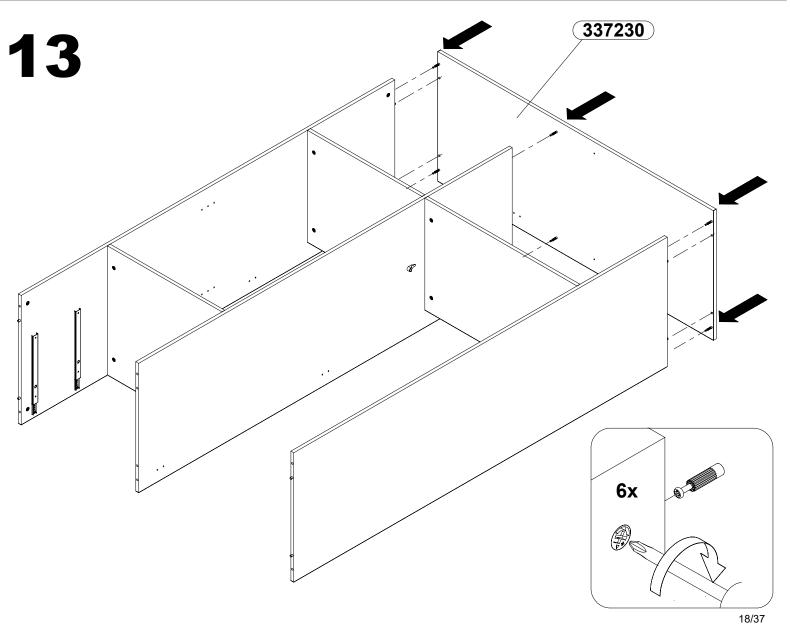


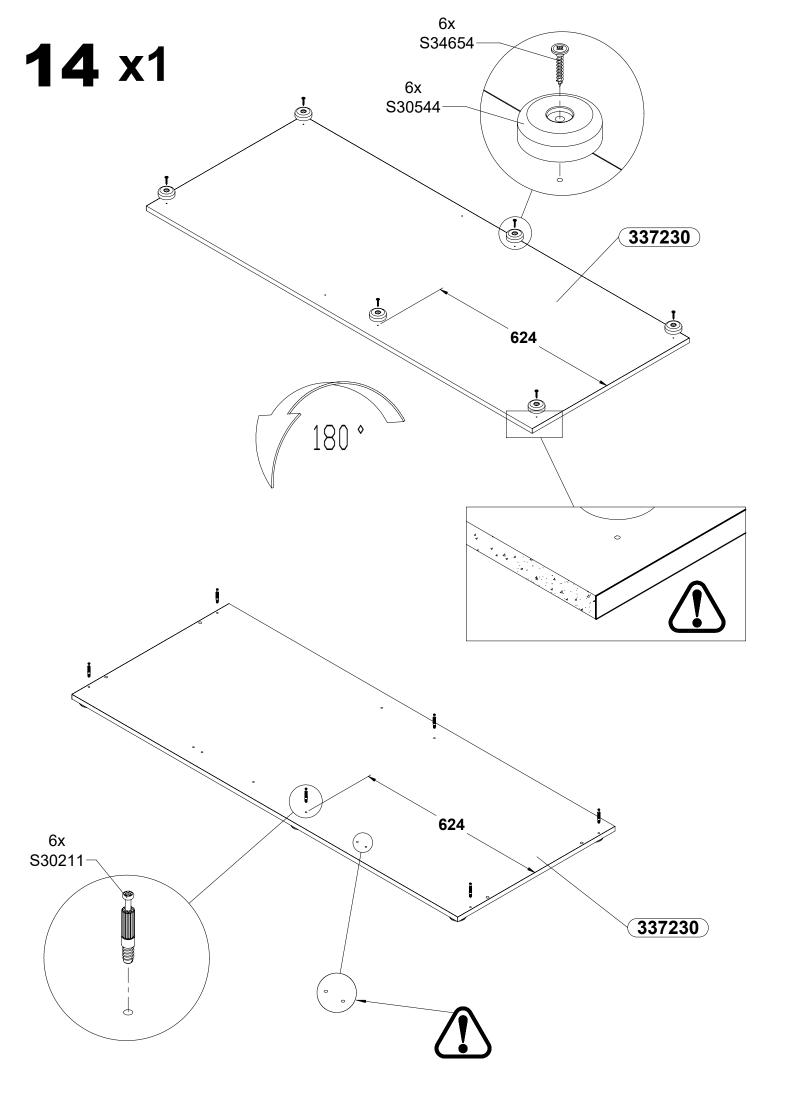


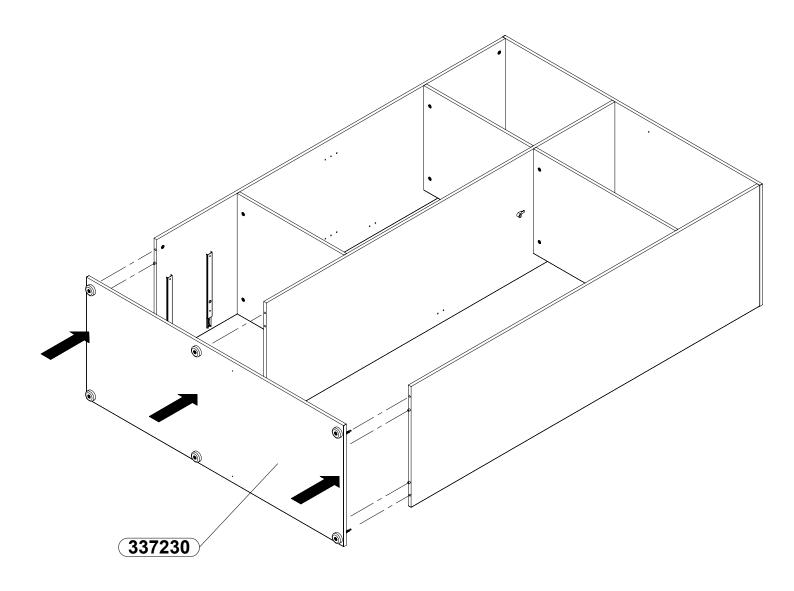




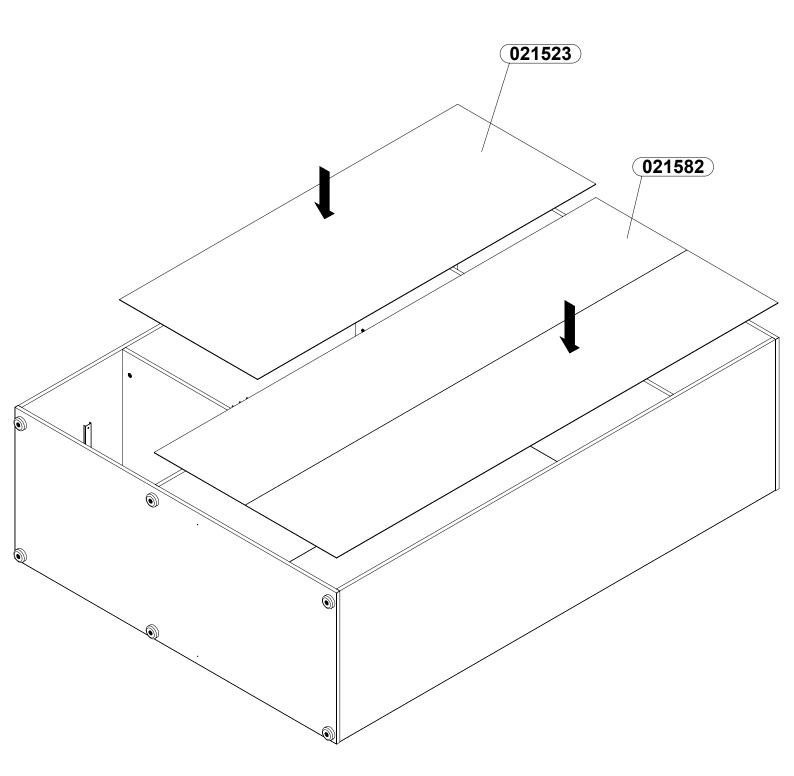


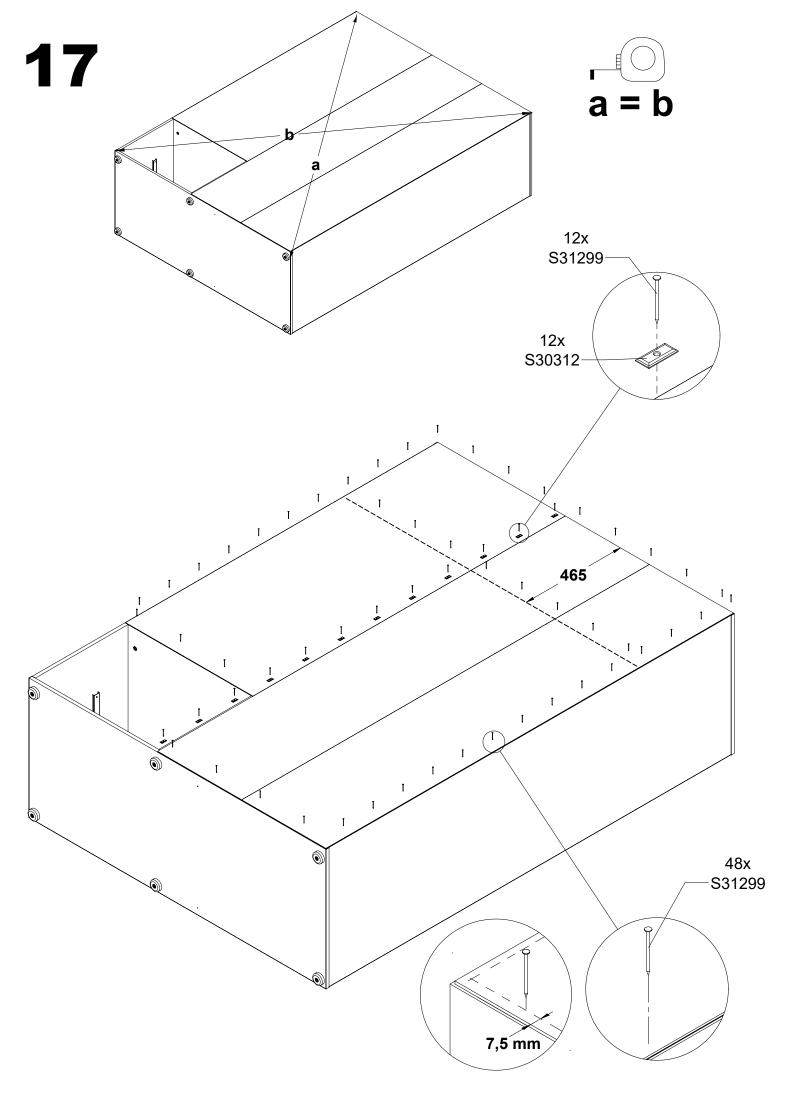

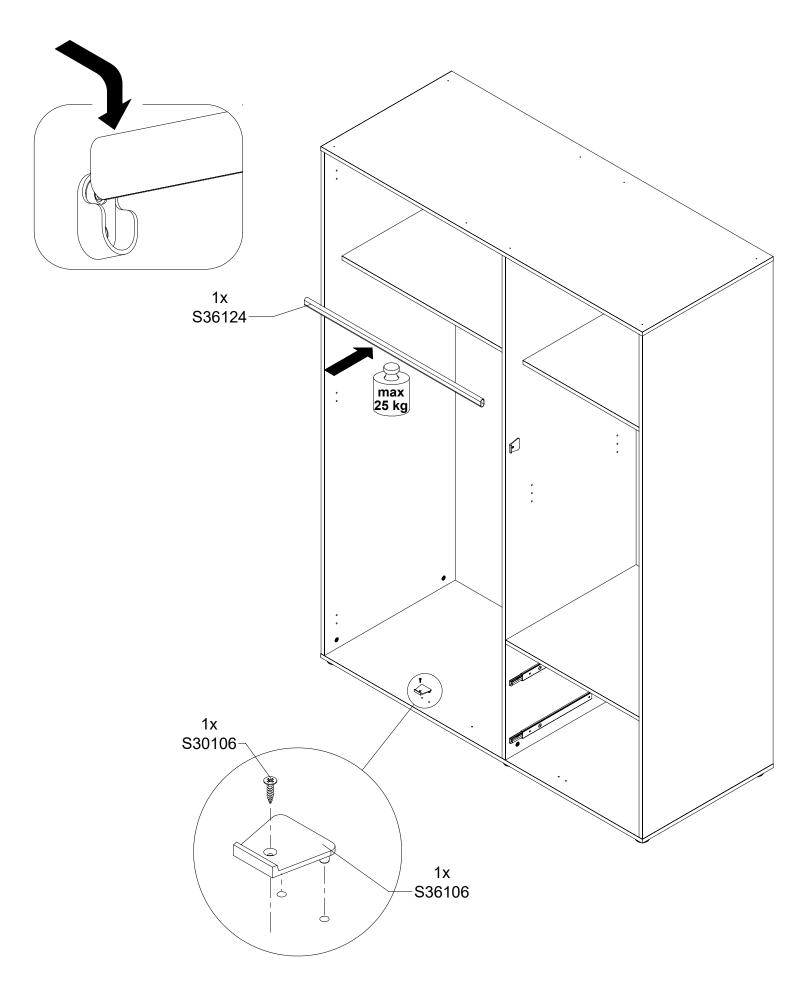





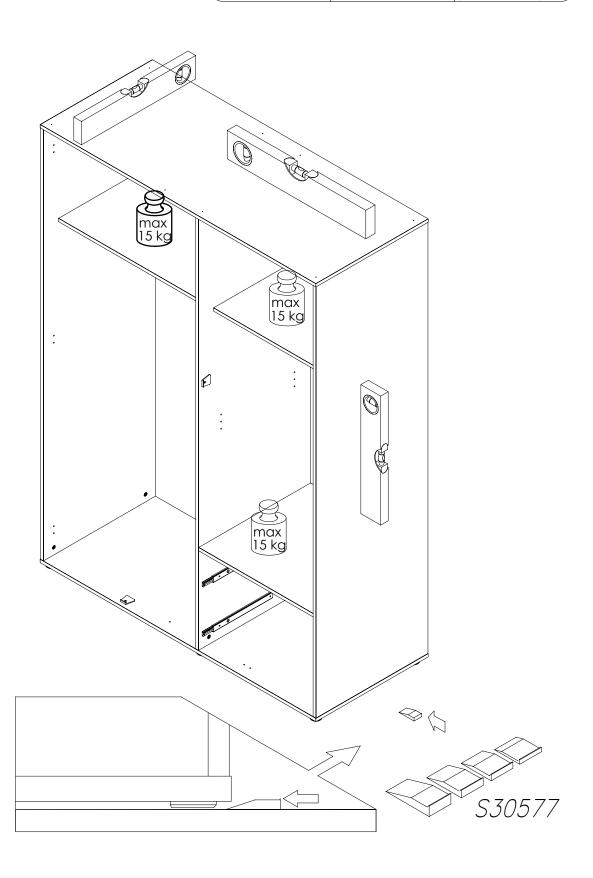


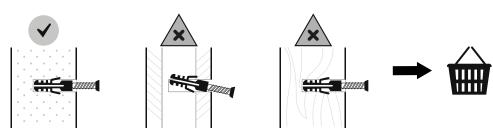



-EN- Before suspending or fixing furniture to the wall (in order to prevent falling over), check the type and strength of the wall. Select wall plugs and screws appropriate for the given type of the wall. In the case of doubts, contact a specialist. The installation must be performed by a competent person. **WARNING!!!** If the rawlplugs with screws are attached to the product, then they are intended only for wall.

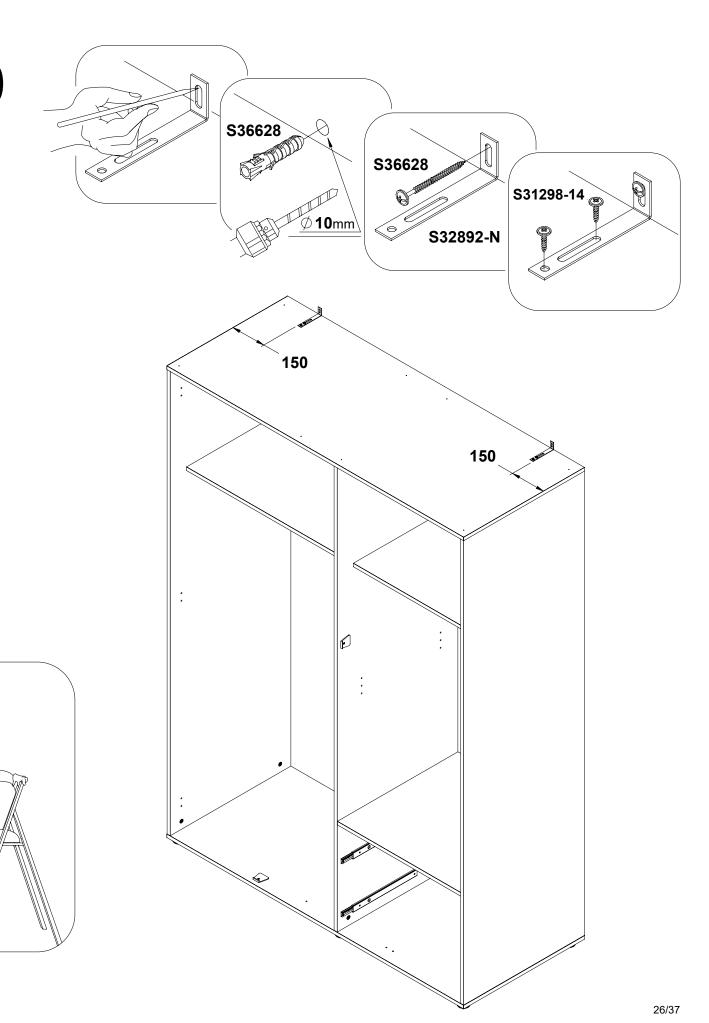


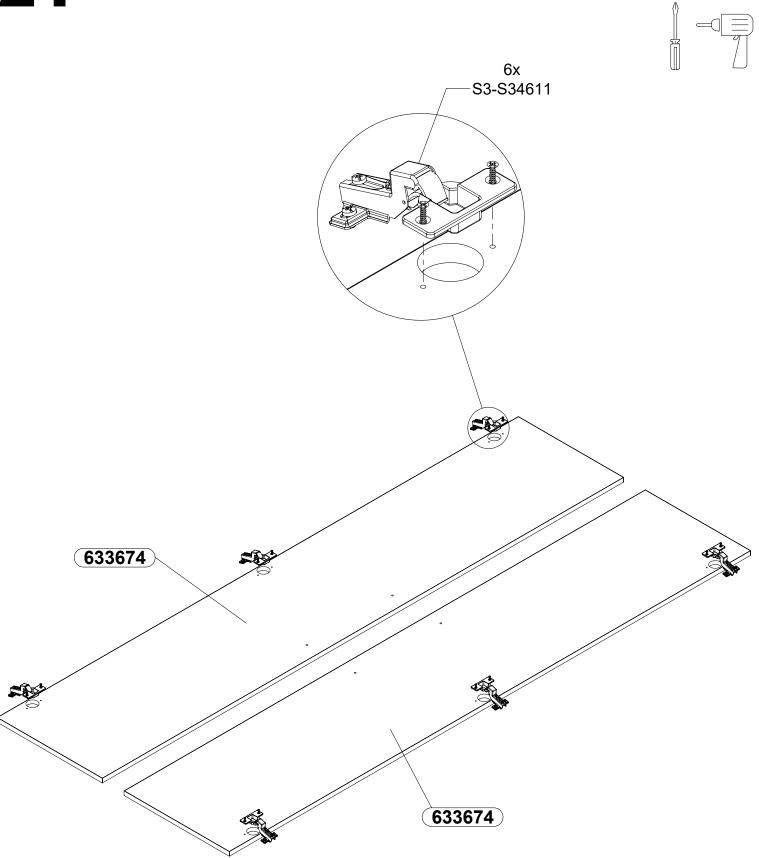

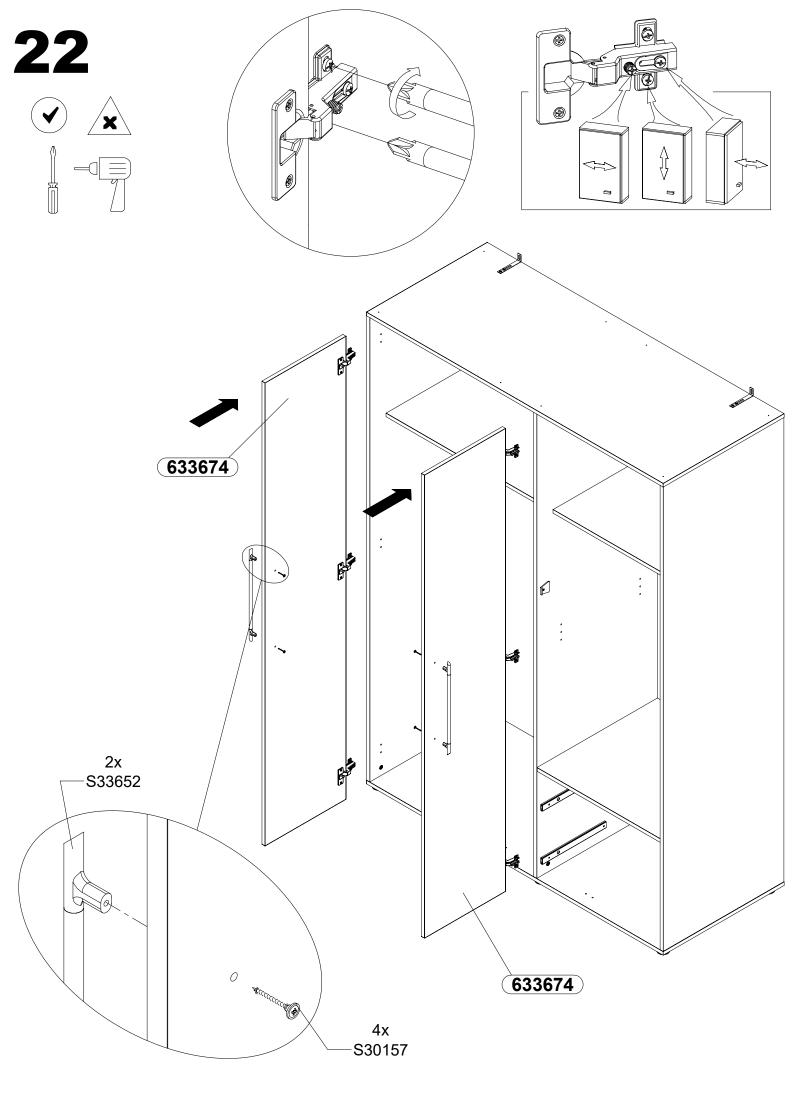




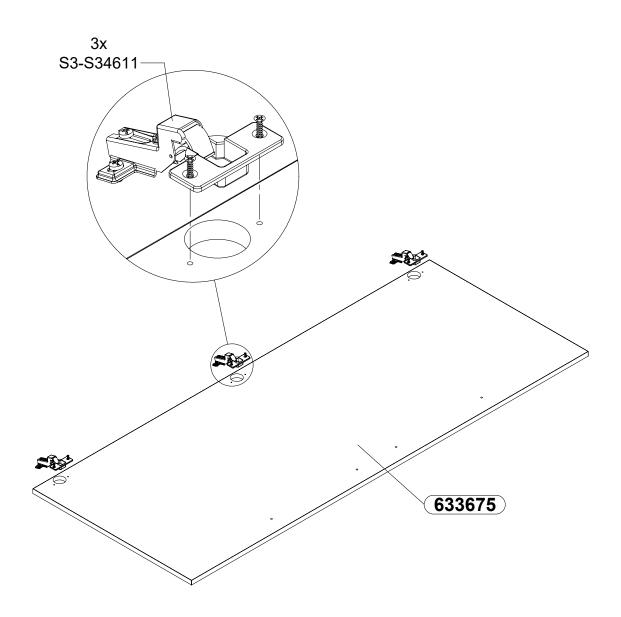


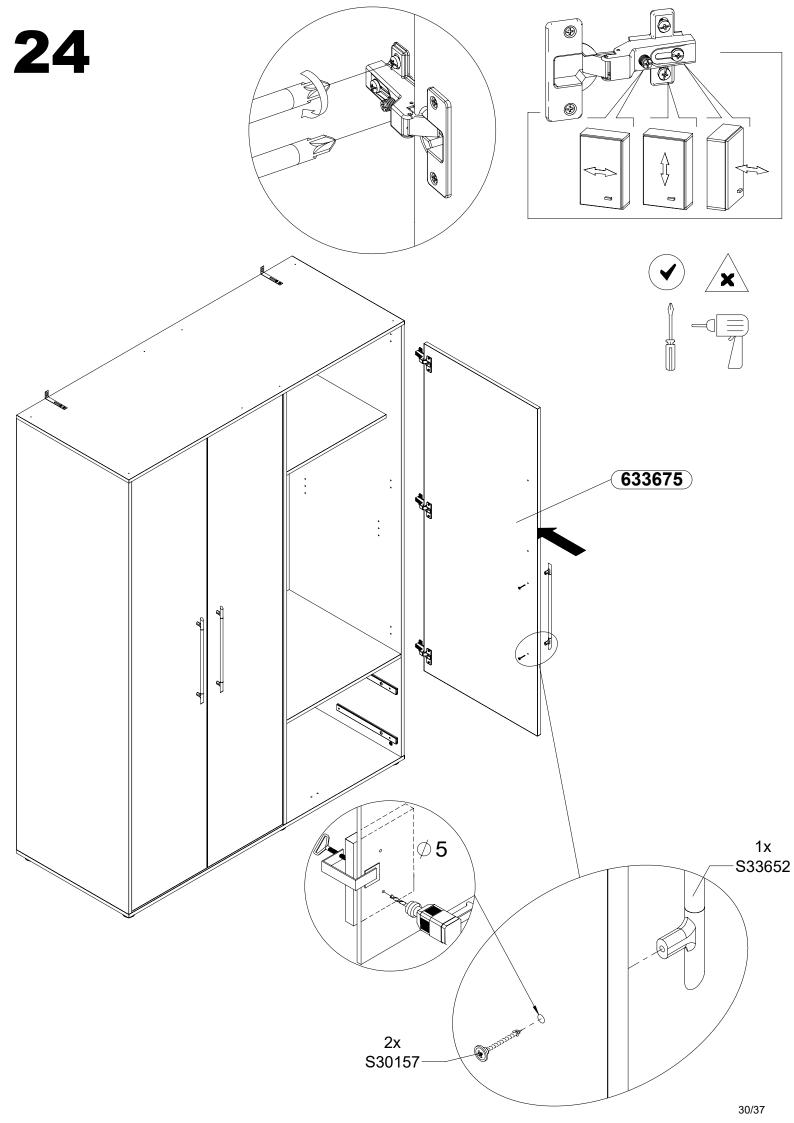



x2

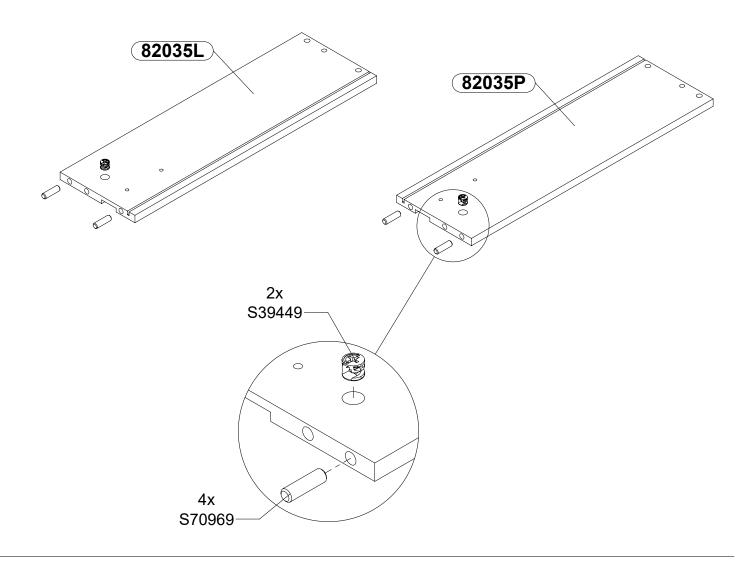


x2

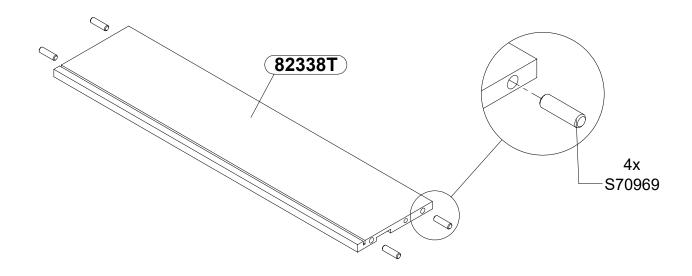


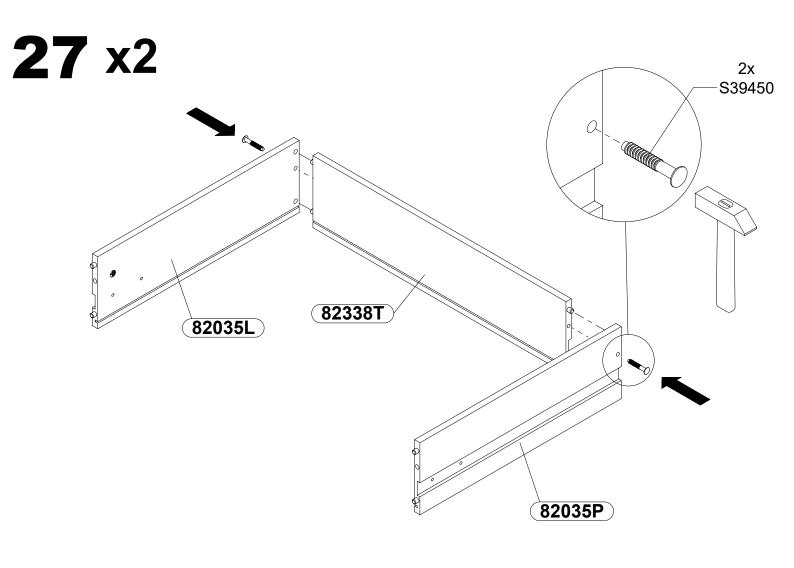


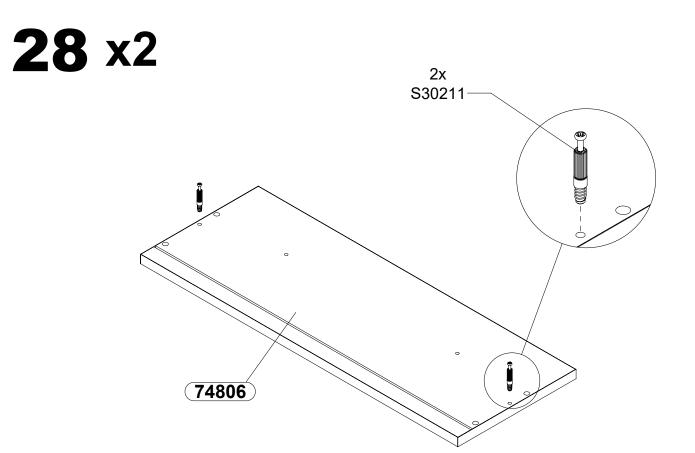


29 x2

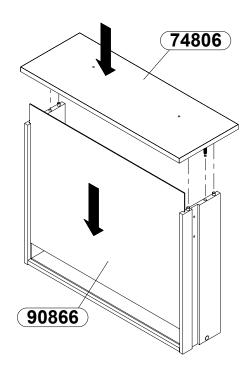










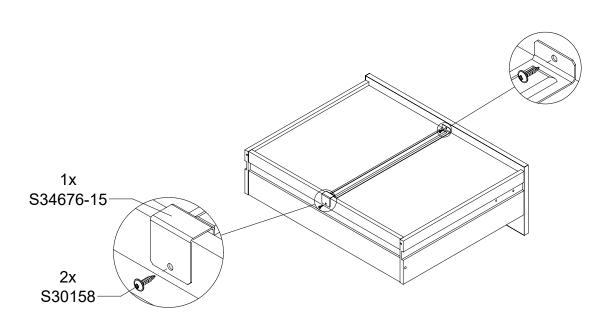

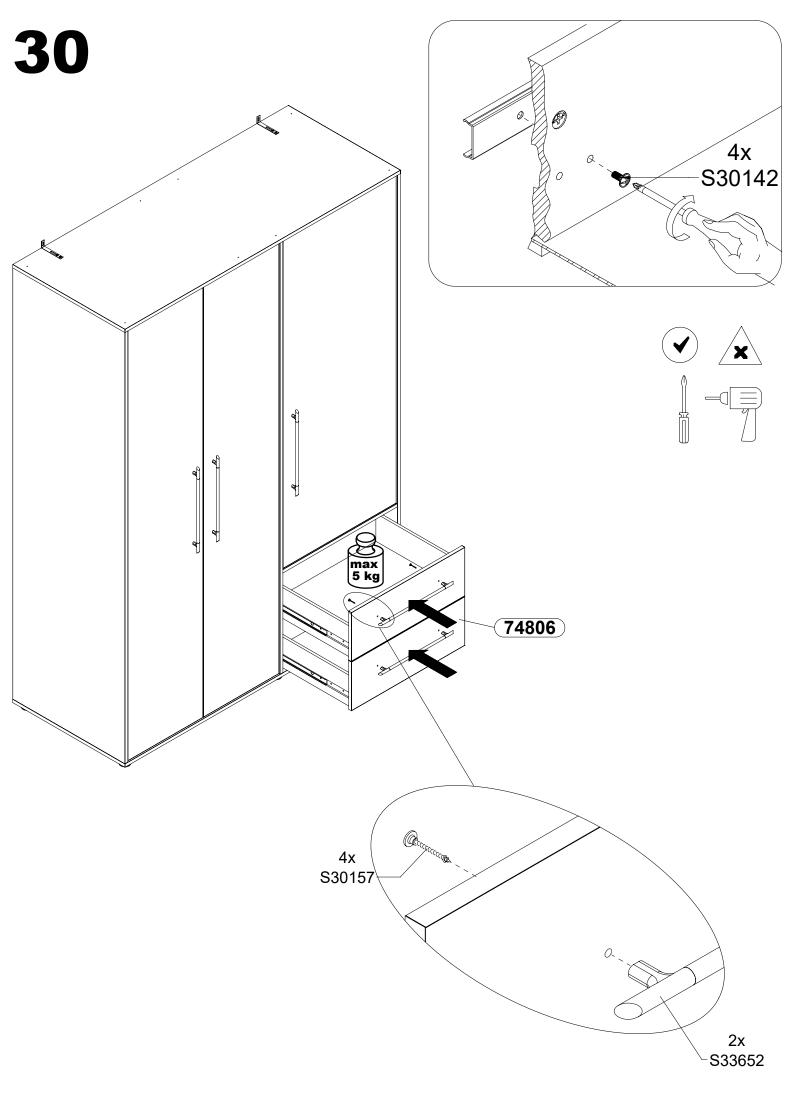

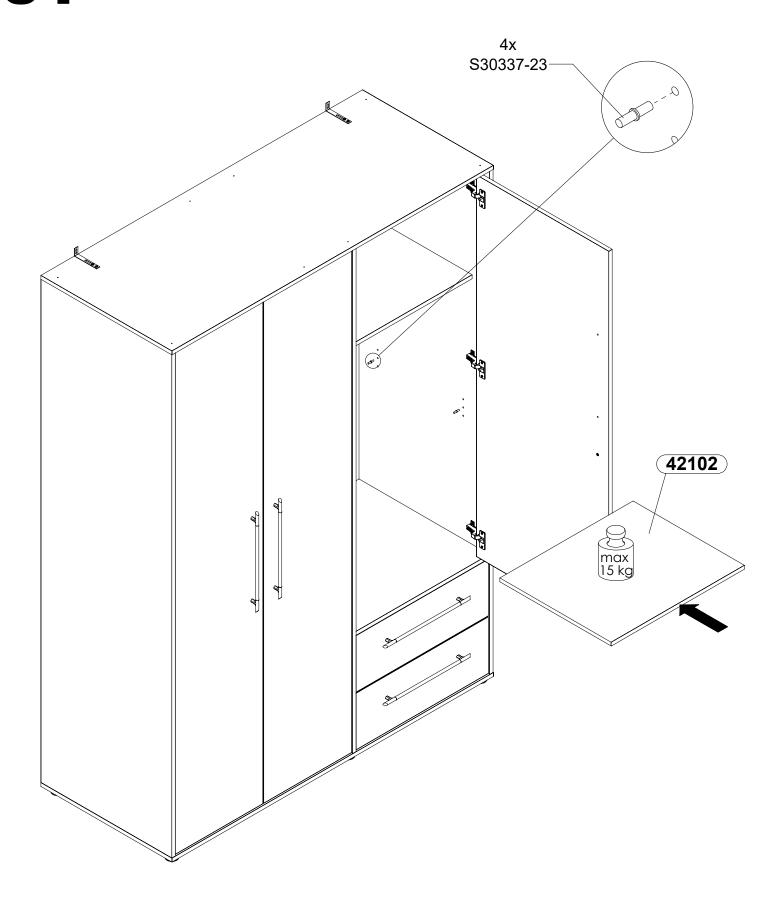





GUIDELINES FOR FURNITURE CARE - EN-

Please follow the below specified remarks in order to properly take care of your furniture:

A clean dry soft fabric must be used for cleaning. If the furniture requires thorough cleaning, then you can slightly moistened it with water or cleaning agent designed for furniture cleaning, and subsequently the designed for furniture cleaning, and subsequently the cleaned elements must be wiped until they're dry. Metal and glass parts must be cleaned using commercially available cleaning agents designed for cleaning of this type of materials, in accordance with the included instructions.

Do not use corrosive agents, scouring agents and other agents if their intended use is unknown.

The cleaning agents must have clear marking that

they are intended for cleaning furniture.

WARNING!!! High gloss elements, from which the protective foll was removed, may be cleaned and used only after 72 hours.